

SMART METER CT002

- Single-phase / Three-phase Power Measured by Current Transformer
- Anti Feed-in with Real-Time Monitoring
- Better Compatibility with MARSTEK Products
- Easy to Install, Suitable for Most Home Distribution Box
- Support Bluetooth/WIFI/Ethernet/RS485 Connections



Marstek Energy Co., Limited

Add: BLDG#A, Changfang Industrial Park, No.2 Guihua 5th Road, Pingshan District, Shenzhen, Guangdong, China


Tel: 86-755-28398778

Email: market@marstekenergy.com

Web: www.marstekenergy.com



SPECIFICATIONS

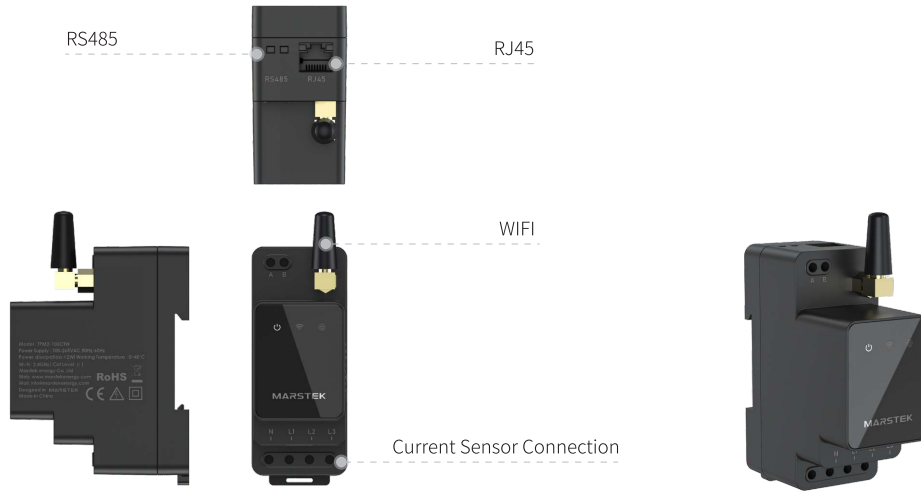

Model	TPM2-100CT
Power Supply Parameters	
AC Voltage	100~265VAC
DC Voltage	/
Function	
Current Measurement range	0~100A
Voltage Measurement range	100~265VAC
Current Measurement Accuracy	1.00%
Voltage Measurement Accuracy	1.00%
Apparent Power	1.00%
Connectivity	
WIFI	2.4GHz : n20
Bluetooth Version	BT 5.4 Dual-Mode
Modulation Mode	GFSK
Communication Ports	RS485/WIFI/Ethernet
Basic Parameters	
Operating Temperature	0~40°C
Device Power Consumption	< 2W
Wiring Type	Three-Phase Four-Wire
Current Channel	3 Channels
Operating Frequency	50Hz / 60Hz
Dimensions	36 × 90 × 67.4mm
Weight	94.4g